


“LP” LOW PROFILE AIR SHOWER

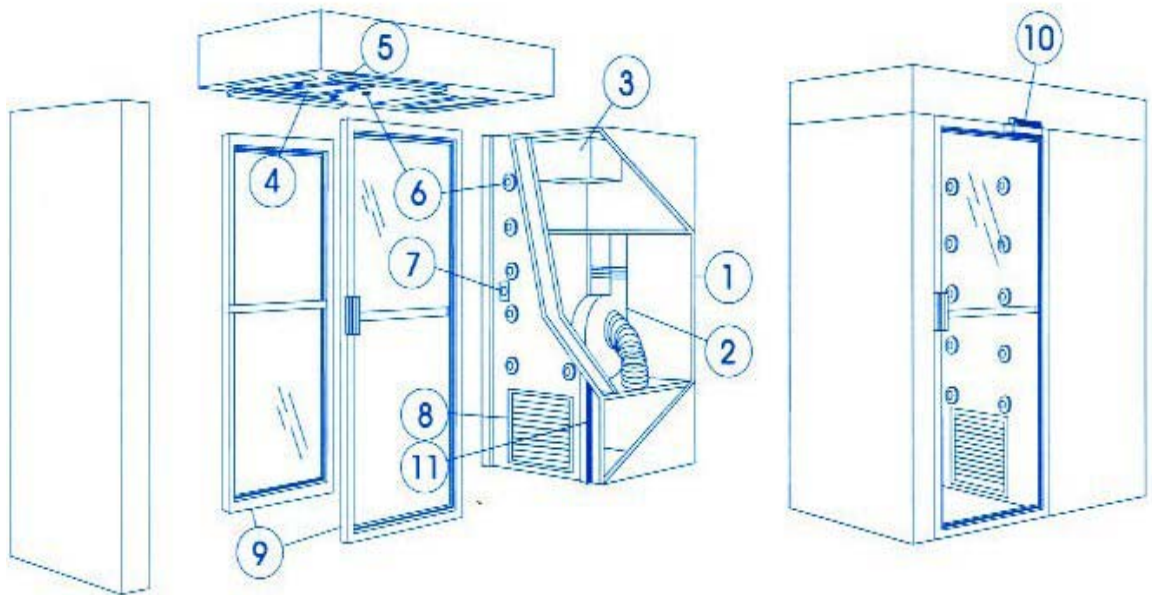

EXPLODED VIEW

ISOMETRIC VIEW

LEGEND

- | | | | |
|----|---------------------------|-----|---|
| 1. | POWER PANEL | 7. | EMERGENCY STOP/RESET SWITCH |
| 2. | DIRECT DRIVE BLOWER | 8. | RETURN AIR GRILLE WITH PRE-FILTER |
| 3. | 99.99% HEPA FILTER | 9. | CLEAR ANODIZED ALUMINUM DOOR FRAME WITH 1/4" CLEAR TEMPERED GLASS |
| 4. | FLUORESCENT LIGHT FIXTURE | 10. | DOOR CLOSERS |
| 5. | DOOR SENSORS & LOCKS | 11. | DOOR SEALS |
| 6. | AIR NOZZLES | | |



www.airshower.com
AIR SHOWERS & PASS THRUS UNLTD, INC
Designers & Manufacturers
PO Box 427 Rancho Cucamonga, CA 91729-0427
(800) 913-0054 Fax: (909) 483-1801

MODEL LP AIR SHOWER TABULAR DATA


MODEL NUMBER	LP6436	LP7242	LP7248	LP7260	LPT6472	LPT7284	LPT7296
WIDTH (A)	64"	72"	72"	72"	64"	72"	72"
LENGTH (B)	36"	42"	48"	60"	72"	84"	96"
DOOR WIDTH (C)	36"	36"	36"	36"	36"	36"	36"
INTERIOR NET WIDTH* (D)	36"	36"	36"	36"	36"	36"	36"
INTERIOR NET LENGTH ** (E)	32"	38"	44"	56"	68"	80"	92"
EXTERIOR HEIGHT (F)	94"	94"	94"	94"	94"	94"	94"
NUMBER OF NOZZLES	24	36	36	36	48	72	72
BLOWER HP	3	5	5	5	3	5	5
NUMBER OF BLOWERS	1	1	1	1	2	2	2
BLOWER CFM @ SYSTEM STATIC	850	1500	1500	1500	850	1500	1500
MOTOR FLA @ 208-230 VAC 3 PHASE***	8	13	13	13	8	13	13
MOTOR FLA @ 440-480 VAC 3 PHASE ***	4	6.5	6.5	6.5	4	6.5	6.5
APPROXIMATE SHIPPING WEIGHT	1970	2250	2400	2550	4100	4350	4650

* FROM FACE OF WALL TO FACE OF WALL EXCLUDING PROTRUSIONS OF NOZZLES AND GRILLES

** FROM FACE OF DOOR TO FACE OF DOOR EXCLUDING PUSH BARS

***PER BLOWER MOTOR

SPECIAL NOTE: DOOR HEIGHT CHANGES TO 80" WITH VLF OPTION

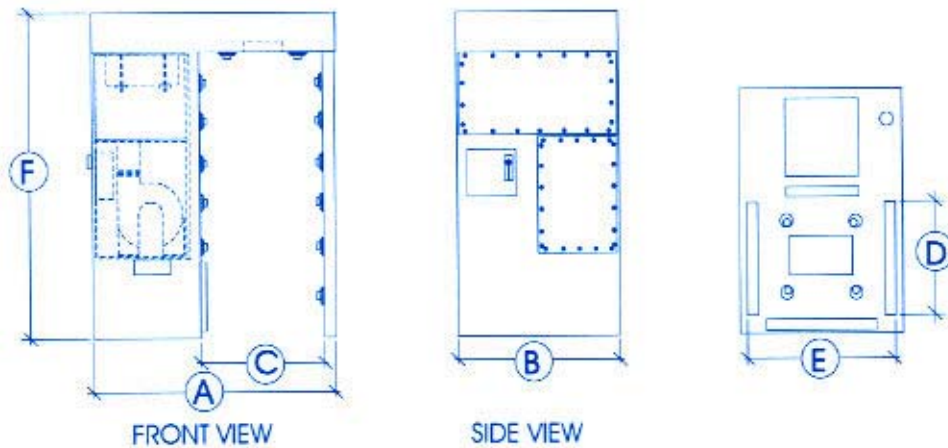

AVAILABLE OPTIONS

ADDITIONAL EMERGENCY STOP STATIONS
 AUDIBLE ALARM
 SPECIAL SIZE DOORS
 PASSAGE LATCH FOR DOORS
 ALUMINUM HONEYCOMB CONSTRUCTION

GAUGES FOR FILTERS
 VFD DRIVES (FOR BLOWER)
 VLF (LAMINAR FLOW CEILING)
 PAINTED STEEL CONSTRUCTION
 304 STAINLESS STEEL CONSTRUCTION